

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/076525 A1

(51) International Patent Classification⁷: C09C 3/06, 1/00

(21) International Application Number: PCT/EP03/02282

(22) International Filing Date: 6 March 2003 (06.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
FI2002A000039 8 March 2002 (08.03.2002) IT

(71) Applicant (for all designated States except US): COL-
OROBIA ITALIA S.P.A. [IT/IT]; Via Pietramarina, 19,
I-50053 Sovigliana, Vinci (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BALDI, Giovanni
[IT/IT]; Via Tizzavoli, 4, I-50025 Montespertoli (IT).
BARZANTI, Andrea [IT/IT]; Via Ripa, 45, I-50053
Empoli (IT). BITOSSI, Marco [IT/IT]; Via Bottinaccio,
14, I-50056 Montelupo Fiorentino (IT).

(74) Agent: GERVASI, Gemma; Notarbartolo & Gervasi
S.P.A., Corso di Porta Vittoria, 9, I-20122 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report
— before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: EMBEDDED PIGMENTS FOR CERAMIC PRODUCTS AND OXIDES IN THE FORM OF NANOMETRIC PARTI-
CLES

(57) Abstract: Described herein are embedded pigments consisting of a labile chromophore englobed in a coating of refractory and
transparent material formed by nanomolecular particles; also described are oxides of refractory and transparent materials in the form
of nanoparticles and their use for coating labile chromophores or ceramic surfaces.

WO 03/076525 A1

EMBEDDED PIGMENTS FOR CERAMIC PRODUCTS AND OXIDES IN THE FORM OF NANOMETRIC PARTICLES

Field of the invention

The present invention relates to embedded pigments used for the colouring of ceramic products and to oxides of refractory and transparent materials in the form of nanometric particles.

State of the art

As is known, ceramic colorants that are applied on a base and then subjected to firing are required to meet particular criteria of brilliancy and of conservation of tonality and moreover must have a particular structure and composition, for example for guaranteeing their stability at high temperatures, to which they are subjected during the steps of production of the end products.

Should the chromophore elements responsible for the colour, which are normally oxides or non-oxides as cadmium sulphide and cadmium sulpho selenide, be thermolabile substances, their use as such in the ceramic field is practically ruled out or limited at low application temperatures..

A possible solution would be that of protecting said labile chromophores by englobing them in a refractory component capable of protecting them in the conditions of application and of enabling them to maintain their chromatic characteristics and therefore develop the desired colouring.

However, the preparation of said protected pigments (hereinafter defined as "embedded pigments") presents considerable difficulties.

Up to the present day the only pigment of this type known is Cd(S,Se) englobed in zirconium silicate with formula $\text{ZrSiO}_4 : \text{Cd}(\text{S},\text{Se})$.

The above pigment is produced with a traditional process of thermal treatment of raw materials at high temperatures, in which there is applied a certain overpressure to prevent decomposition of the labile species.

In practice, in special sealed muffle furnaces $\text{CdCO}_3 + \text{S} + \text{Se} + \text{ZrO}_2 + \text{SiO}_2$ are made to react at high temperatures in the presence of mineralizing agents, in general fluorine compounds. (An alternative process envisages synthesis with sulphites.)

The overpressure that is created inside the special furnace prevents the decomposition of the cadmium sulphoselenide Cd(S,Se) that has formed. In this way,

the zirconium silicate manages to encapsulate the thermolabile chromophore, enabling the use of the pigment that has thus been formed even in conditions of high temperatures and in environments that are particularly aggressive.

In practice, then, crystals of cadmium sulphoselenide are thus embedded in crystals of ZrSiO₄ that have formed in the solid state.

On the other hand, in the literature (see, for example, Claus Feldman, "Preparation of Nanoscale Pigment Particles", Adv. Mater. 2001, 13, No. 17, September 3, pp. 1301-1303; Claus Feldman *et al.*, "Polyol-Mediated Preparation of Nanoscale Oxide Particles" Angew. Chem. Int. Ed., 2001, 40, No. 2, pp. 359-362, and Jacqueline Merikhi *et al.*

"Sub-micrometer CoAl₂O₄ pigment particles – synthesis and preparation of coatings", J. Mater. Chem. 2000, 10, pp. 1311-1314), there are described inorganic substances containing metal oxides in the form of particles of nanometric dimensions. In particular, there are described suspensions of particles of CoAl₂O₄, TiO₂, ZnCo₂O₄, Ta₂O₅, Fe₂O₃, Nb₂O₅, CoO, ZnO, Cu₂O, Cr₂O₃, Ti_{0.85}Ni_{0.05}Nb_{0.10}O₂, Cu(Cr,Fe)O₄, in addition to metals of the type: Sn⁰, Fe⁰, Ru⁰, Au⁰, Co⁰, Ni⁰; and Ni-Co, Ag⁰, Pd⁰, Rh⁰, Pt⁰, alloys having nanometric dimensions. However, no indication regarding their use as ceramic colorants for the decoration of stoneware or ceramic glazes appears in the aforesaid documents.

In this connection, it should be noted that the aforesaid products cannot be used for preparing the embedded pigments as described above or, in any case, for constituting protective layers on ceramic materials.

Moreover, in the parallel patent in the name of the present applicant there have been described colorants, amongst which chromophore oxides, for ceramic products or textile products, consisting of particles having nanometric dimensions in the form of suspensions or powders.

It is obvious, in the light of what has been said, how important it would be to have available pigments that enable exploitation of the colouring capacities of thermolabile chromophores.

Detailed description of the invention

The present invention enables all of the problems referred to above to be overcome thanks to embedded pigments consisting of a labile chromophore embedded in a shell (coating) of refractory and transparent material consisting of aggregate nanoparticles (clusters), which adhere to the surface of the labile chromophore.

According to the invention the labile chromophore may, in turn, assume the form of nanometric particles or else crystals of dimensions ranging between approximately 1 μm and 15 μm .

By the term "nanometric particles", according to the invention, are meant particles having a mean diameter comprised between 5 nm and 600 nm.

Labile chromophore compounds according to the invention are all those compounds that are decomposed under the action of heat, an oxidizing atmosphere, or in the presence of melted substances, such as in the case of application in glasses or glazes.

In particular, the following should be recalled: cadmium sulphoselenide; red hematite Fe_2O_3 , which dissolves in a glass or in an enamel yielding the colour of the brown chromophore Fe^{3+} ; wolframium bronzes $\text{M}_n^{\text{I}}\text{WO}_3$, where M^{I} is an alkaline metal and $0.1 < n < 0.95$, which have colours that range from red to dark blue according to the value of n ; or molybdenum blues $\text{MoO}_x(\text{OH})_y$ (where $x = 2$, and $y = 1$; or $x = 2.5$, and $y = 0.5$).

Refractory and transparent materials in the form of nanoparticles, according to the invention, capable of protecting labile chromophores or to be applied as such on other materials as hereinafter specified, are for example:

ZrO_2 , Al_2O_3 , SnO_2 , ZrSiO_4 , SiO_2 , TiO_2 , CeO_2 and ZnO .

In addition to what has been said previously, according to a particular embodiment of the invention, the refractory and transparent materials in the form of nanoparticles as defined above may be used just as they are for coating ceramic materials in order to improve ceramic surfaces from the aesthetic point of view and/or from the chemico-physical point of view.

Embedded pigments according to the present invention are thus constituted by a thermolabile chromophore (as defined above) coated with a coating made up of nanoparticles of transparent refractory oxides (as defined previously).

In particular, embedded pigments according to the invention are ones chosen in the group consisting of:

$\text{ZrSiO}_4 : \text{Fe}_2\text{O}_3$, $\text{ZrSiO}_4 : \text{Cd}(\text{S}, \text{Se})$, $\text{ZrO}_2 : \text{Cd}(\text{S}, \text{Se})$, $\text{SiO}_2 : \text{Cd}(\text{S}, \text{Se})$, $\text{Al}_2\text{O}_3 : \text{Cd}(\text{S}, \text{Se})$, $\text{Al}_2\text{O}_3 : \text{Fe}_2\text{O}_3$, $\text{SnO}_2 : \text{Fe}_2\text{O}_3$, $\text{SnO}_2 : \text{Cd}(\text{S}, \text{Se})$, $\text{SiO}_2 : \text{MoO}_x(\text{OH})_y$, $\text{Al}_2\text{O}_3 : \text{MoO}_x(\text{OH})_y$, $\text{SnO}_2 : \text{MoO}_x(\text{OH})_y$, $\text{ZrO}_2 : \text{MoO}_x(\text{OH})_y$, $\text{ZrSiO}_4 : \text{MoO}_x(\text{OH})_y$ (where $x = 2$, and $y = 1$; or $x = 2.5$, and $y = 0.5$), $\text{SiO}_2 : \text{M}_n\text{WO}_3$, $\text{Al}_2\text{O}_3 : \text{M}_n\text{WO}_3$, $\text{SnO}_2 : \text{M}_n\text{WO}_3$, $\text{ZrO}_2 : \text{M}_n\text{WO}_3$, $\text{ZrSiO}_4 : \text{M}_n\text{WO}_3$ (where $0.1 < n < 0.95$, and M is chosen in the group consisting of Na, K,

Li, Ca, Sr, Ba, Cu, Zn, Cd, In, Sn, La).

The embedded pigments according to the invention may be prepared using the known processes as described in the above-mentioned patent application.

In particular, it is possible to use the polyol process, which is widely described in the literature.

In brief, the process consists in the use of a high-boiling alcohol, which makes it possible to work at high temperatures and to complex the particles being formed, so preventing their growth.

Normally, the process is to add to a known volume of alcohol (for example, DEG) the salts (preferably acetates, carbonates, sulphates, oxalates, chlorides) of the desired metals. The solution is then heated and is simultaneously kept under stirring up to complete solubilization of the salts. Water is added in the desired amount for facilitating hydrolysis of the salts (which leads to the formation of the corresponding oxides), and the solution is then heated up to a temperature that depends upon the pigment that is to be prepared and is, in any case, higher than 120°C.

The alcohol not only facilitates the formation of the oxides but, thanks to its complexing capacity, prevents the growth of the particles.

More In particular, as regards the embedded pigments according to the invention, in which the labile chromophore is in the form of nanometric particles, there are obtained first the nanometric particles of labile chromophore, upon which there are then superimposed the nanometric particles of refractory transparent material, as illustrated in the examples provided in what follows.


Should, instead, the chromophore be in the form of a crystal, this will be prepared in a traditional way and will then be englobed in the cluster of nanometric particles of transparent refractory material that will be deposited thereon.

After remaining for a period at a high temperature, which varies from system to system, there is obtained a suspension which, once left to cool down to room temperature, is used just as it is or else centrifuged and dried.

Once dried, the powder thus obtained is applied in the usual ways in ceramic bodies or in enamels, or else is calcined in a rapid cycle with times that range generally from 1 to 6 hours at a temperature of between 400°C and 1200°C so as to obtain the pigment proper.

The processes described in the examples may be summed up in the following illustrative diagram:

DIAGRAM

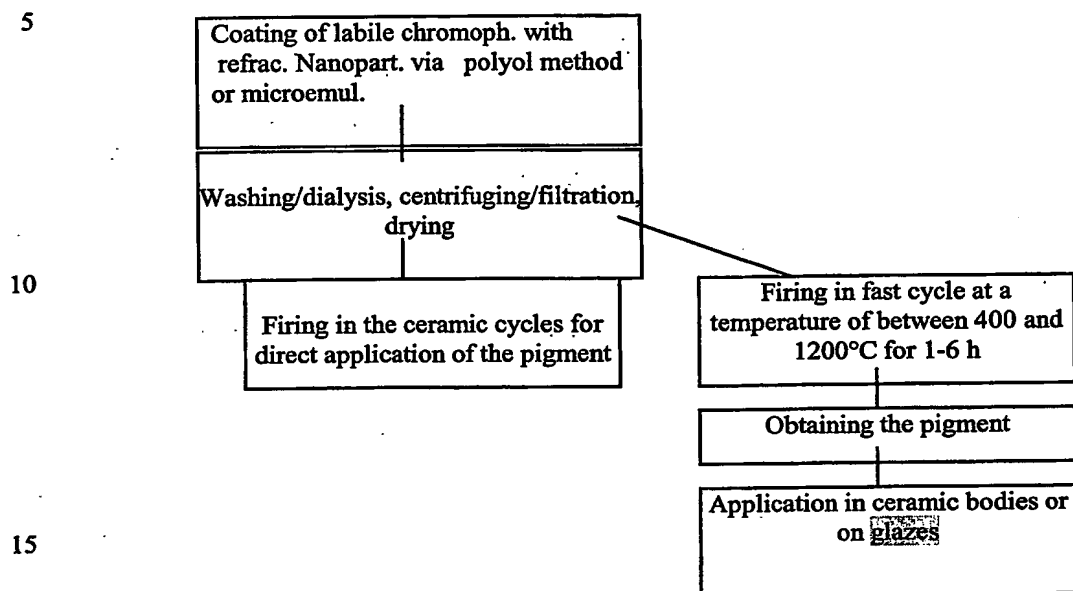

In particular the microemulsion technique consists in preparing a dispersed phase (for example water) in a main phase (for example a solvent like n-hexane) using a tensioactive which can be ionic, non-ionic or anionic.

20 By regulating appropriately the quantities of the above said three components, water droplets mono dispersed in the solvent are obtained.

Pouring in a reactor micro-emulsions containing two or more reagents and letting them react (for example under the action of stirring, ultrasounds, etc.) by fusion of the respective droplets, various complexes can be obtained.

25 Provided hereinafter are some examples of preparation of oxides and embedded pigments according to the invention. For each example, two different methods of preparation are described.

EXAMPLE 1

Preparation of the transparent refractory material

30 Reagents:

9.22 g. of $\text{ZrOCl}_2 \times 8\text{H}_2\text{O}$

100 cc of DEG (diethylenglycol)

Synthesis

100 cm³ of DEG and the indicated quantity of ZrOCl₂ are poured in three necked reactor equipped with stirrer, reflux refrigerator and thermometer. The suspension is stirred and heated until the reagents are completely solved. Thereafter the solution is heated up to 170°C; the solution becomes immediately opalescent and is left under vigorous stirring for 1 hour at 170°C.

Finally the solution is cooled down and a transparent solution of ZrO₂ is obtained.

EXAMPLE 2

Reagents:

6.04 g. of Zn(CH₃COO)₂ x 2 H₂O
200 cc of DEG (diethylenglycol)

Synthesis

200 cm³ of DEG and the indicated quantity of Zn(CH₃COO)₂ are poured in three necked reactor equipped with stirrer, reflux refrigerator and thermometer. The suspension is stirred and heated until the reagents are completely solved. Thereafter the solution is heated up to 160°C, 0,4 g. of deionised water are added to help the hydrolysis. The solution becomes immediately opalescent and is cooled down giving a solution of ZnO.

EXAMPLE 3

Phase I

Reagents

71.60 cc of Ti[OCH(CH₃)₂]₄
71.42 cc of DEG (diethylen glycol)

Synthesis

71.42 cm³ of DEG are poured in a four necked reactor equipped with a stirrer, a Liebig's refrigerator a thermometer and dropping funnel and heated up to 140°C. 71.60 cm³ of titanium isopropoxy derivative are dropped slowly in the solution. Since white vapours of TiO₂ develop because of the violent decomposition of the alkoxy derivative, it is better to work in nitrogen current.

When the alkoxy derivative contacts the DEG it decompose, the forming isopropyl alcohol is distilled away.

The solution is cooled down and a viscous, yellow product is collected (such product is still reactive but less reactive than the starting alkoxy derivative).

Phase II

Reagents:

- 5 25.00 cc of phase I product
- 100 cc of DEG (diethylen glycol)
- 20 cc H₂O (deionised)
- 30 cc Acetic acid 80%

Synthesis

- 10 100 cc of DEG, 20 cc of deionised H₂O and 30 cc of acetic acid are poured in a three necked reactor equipped with stirrer, thermometer and reflux refrigerator.

The mixture is heated up to about 60 °C, thereafter 25 cc of the product collected at the end of Phase I is added with a peristaltic pump, the addition must be done very slowly in order to allow the solution of the product as soon as it contacts the

- 15 DEG. The pipe of the peristaltic pump must be immersed in the solution (acting as described the formation of lumps is avoided).

The mixture is heated up to reflux (about 120°C) and left at such temperature for 30 minutes, a yellow solution of TiO₂ is obtained, which can be diluted in water.

EXAMPLE 4

- 20 10 g of CdSSe in crystals are suspended in 100 cc of DEG (diethylene glycol). There are added 2.65 g of Zr(CH₃COO)₄ and 2 cc of H₂O at room temperature, and then the solution is heated to 120°C.

It is left under stirring under reflux for 2 h, and then the temperature is raised to 180°C, and it is left at this temperature for 4 h.

- 25 After cooling to room temperature, there is obtained a red suspension consisting of Cd(S,Se) with a coating of ZrO₂. The suspension is filtered, and the material is dried to obtain the red pigment of Cd(S,Se) embedded in ZrO₂, which can be formalized as ZrO₂:Cd(S,Se).

The material is washed with an appropriate solvent, in general water, filtered and dried.

- 30 EXAMPLE 5

10 g of Cd(S,Se) in crystal form are suspended in 100 cc of DEG (diethylene glycol). There are then added at room temperature 3.22 g of ZrOCl₂·8H₂O, and 2.08 cc of

TEOS (tetraethyl orthosilicate), and then 2 cc of H_2O . The solution is heated to $120^\circ C$.

It is left under stirring under reflux for 30 minutes, and then the temperature is raised to $180^\circ C$, and the solution is left at this temperature for 4 h.

After cooling to room temperature, there is obtained a red suspension consisting of
5 $Cd(S,Se)$ with a coating of nanometric particles of $ZrSiO_4$. The suspension is filtered, and the material is dried to obtain the red pigment of $Cd(S,Se)$ embedded in $ZrSiO_4$, which can be formalized as $ZrSiO_4 : Cd(S,Se)$.

EXAMPLE 6

10 10 g of Na_nWO_3 , where $n = 0.9$, are suspended in 100 cc of DEG (diethylene glycol).

There are then added 3.05 g of $Al(CH_3COO)_2OH$ and 2.2 cc of H_2O at room temperature, and then the solution is heated to $130^\circ C$.

It is left under stirring under reflux for 2.5 h, and then the temperature is raised to $180^\circ C$, and it is left at this temperature for 3 hours.

After cooling to room temperature, there is obtained a red suspension consisting of
15 Na_nWO_3 , where $n = 0.9$ with a coating of Al_2O_3 .

The suspension is filtered, and the material is dried to obtain the blue pigment of Na_nWO_3 , where $n = 0.9$, embedded in Al_2O_3 , which may be formalized as $Al_2O_3 : Na_nWO_3$, where $n = 0.9$.

The suspensions of the embedded pigments obtained according to the examples given
20 above are then subjected to a washing or dialysis, centrifuging or filtration and drying, as mentioned previously.

The suspensions according to Example 1 can be applied on a porcelain-stoneware substrate unfired or else fired in such a way as to fill in the porosities with the oxide and improve its surface mechanical properties (e.g., resistance to abrasion) and absorption
25 of H_2O .

Alternatively, the suspensions of Example 1 may be applied on substrates of non-ceramic materials (plastics, metals) so that thermal treatments at low temperature will enable the formation of a layer of ZrO_2 or TiO_2 .

The pigments obtained from Examples 2, 3 and 4 can be used for ceramic applications
30 at high temperatures ($>1200^\circ C$), as compared to ones that can be used with the pigment $Cd(S,Se)$, lower than $1000^\circ C$, since the coating bestows a greater refractoriness on the pigment, which, during the firing operations in an oxidizing

atmosphere in ceramic applications, is decomposed easily.

All the suspensions described can also be used for ennobling glazes with good aesthetic characteristics but with poor resistance to acid or alkaline attack, or with poor resistance to wear.

- 5 The suspensions can be used in textile applications, both for instance using the technique of impregnation of the fibre and that of spreading with an adequate thickening means according to the specific chemico-physical characteristics of the material.

Moreover the suspension can be used in the cosmetic field.

- 10 In addition to the better mechanics characteristics which are imparted by the suspension is should be noted that TiO_2 show anti-bacteria and anti-UV properties, ZnO suspensions can be used as anti UV in textiles and solar creams, ZrO_2 suspension act as anti-flame for textiles and improve the resistance of ceramic products.

- 15 The suspensions can be used also in the catalysts field by impregnating appropriate porous substrates (for example ceramic) or, once reduced to powders, for moulding catalysts.

The described suspensions can be also used as fillers in the production of plastic- or rubber-materials; for example the refractory and transparent oxides described above can be used in the production of UV-resistant transparent plastic- or rubber-materials.

CLAIMS

1. Embedded pigments consisting of a labile chromophore embedded in a shell of refractory and transparent material consisting of aggregate nanoparticles adhering to the surface of the labile chromophore.

5 2. The pigments according to Claim 1, in which the labile chromophore is in turn in the form of a nanometric particle.

3. The pigments according to Claim 1, in which the labile chromophore is in the crystal form.

10 4. The pigments according to Claims 1 to 3, in which the labile chromophore is chosen in the group consisting of: cadmium sulphoselenide, hematite (Fe_2O_3), wolframium bronzes $\text{M}'_n\text{WO}_3$, where M' is an alkaline metal and $0.1 < n < 0.95$, or else molybdenum blues $\text{MoO}_x(\text{OH})_y$, (where $x = 2$, and $y = 1$; or $x = 2.5$, and $y = 0.5$).

15 5. The pigments according to Claims 1 to 4, in which the shell of refractory and transparent material consists of nanoparticles of oxides chosen in the group consisting of: ZrO_2 , Al_2O_3 , SnO_2 , ZrSiO_4 , SiO_2 , TiO_2 , CeO_2 , ZnO .

6. The embedded pigments according to Claims 1 to 5 chosen in the group consisting of:

$\text{ZrSiO}_4 : \text{Fe}_2\text{O}_3$,

$\text{ZrSiO}_4 : \text{Cd}(\text{S}, \text{Se})$,

20 $\text{ZrO}_2 : \text{Cd}(\text{S}, \text{Se})$,

$\text{SiO}_2 : \text{Cd}(\text{S}, \text{Se})$,

$\text{Al}_2\text{O}_3 : \text{Cd}(\text{S}, \text{Se})$,

$\text{Al}_2\text{O}_3 : \text{Fe}_2\text{O}_3$,

$\text{SnO}_2 : \text{Fe}_2\text{O}_3$,

25 $\text{SnO}_2 : \text{Cd}(\text{S}, \text{Se})$,

$\text{SiO}_2 : \text{MoO}_x(\text{OH})_y$

$\text{Al}_2\text{O}_3 : \text{MoO}_x(\text{OH})_y$

$\text{SnO}_2 : \text{MoO}_x(\text{OH})_y$

$\text{ZrO}_2 : \text{MoO}_x(\text{OH})_y$

30 $\text{ZrSiO}_4 : \text{MoO}_x(\text{OH})_y$

(where $x = 2$, and $y = 1$; or $x = 2.5$, and $y = 0.5$)

$\text{SiO}_2 : \text{M}'_n \text{WO}_3$

$\text{Al}_2\text{O}_3 : \text{M}_n \text{WO}_3$

$\text{SnO}_2 : \text{M}_n \text{WO}_3$

$\text{ZrO}_2 : \text{M}_n \text{WO}_3$

$\text{ZrSiO}_4 : \text{M}_n \text{WO}_3$

- 5 (where $0.1 \leq n < 0.95$, and M is chosen in the group consisting of Na, K, Li, Ca, Sr, Ba, Cu, Zn, Cd, In, Sn, La).

7. The process for the preparation of the nanometric particles according to Claims 1 to 6, in which:

- the salts of the desired metals are added to a known volume of alcohol;
- 10 - the solution is heated under stirring up to complete solubilization of the salts;
- water is added in the desired amount for facilitating hydrolysis of the salts, and the solution is heated up to a temperature higher than 150°C ; and
- the suspension is left to cool and possibly centrifuged; the precipitate is collected and washed and dried.

- 15 8. The process for the preparation of the pigments according to Claims 1 to 6, in which first the nanometric particles of labile chromophore are prepared, and then the nanometric particles of transparent refractory material are superimposed thereon.

9. The process for the preparation of the pigments according to Claims 1 to 6, in which the labile chromophore is prepared in the form of a crystal according to the known
20 methodologies, and then the nanometric particles of transparent refractory material prepared according to Claim 7 are deposited on the surface of said crystal.

10. Refractory and transparent oxides in the form of nanometric particles chosen in the group consisting of: ZrO_2 , Al_2O_3 , SnO_2 , ZrSiO_4 , SiO_2 , TiO_2 , CeO_2 , ZnO .

11. Use of the embedded pigments according to Claims 1 to 6 for ceramic applications
25 at high temperatures.

12. Use of the pigments according to Claims 1 to 6 for applications in the textile field.

13. Use of the oxides according to Claim 10 for the coating of surfaces in porcelain stoneware or non-ceramic substrates.

14. Use of the oxides according to Claim 10 for applications in the textile field.

- 30 15. Use of the pigments according to claim 1 – 6 and of the oxides according to claim 10 in the catalysts, cosmetic and in the plastic-, rubber-materials industry.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/02282

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C09C3/06 C09C1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C09C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FELDMANN: "Preparation of nanoscale pigment particles" ADVANCED MATERIALS, vol. 13, no. 17, 2001, pages 1301-1303, XP001153302 cited in the application page 1302	7
X,P	WO 02 40600 A (FLEX PRODUCTS, INC.) 23 May 2002 (2002-05-23) page 24, line 3 -page 30, line 26; claims 1-36; figures 7,10	1-7, 11-15
A	WO 01 60628 A (RONA/EM INDUSTRIES, INC.) 23 August 2001 (2001-08-23) the whole document	1-15
	--- -/-- ---	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

T later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the International search

2 July 2003

Date of mailing of the International search report

14/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Luethe, H

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/02282

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 6 136 083 A (INSTITUT FÜR NEUE MATERIALIEN) 24 October 2000 (2000-10-24) the whole document</p>	1-15

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/02282

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0240600	A	23-05-2002	US 6565770 B1 WO 0240600 A1	20-05-2003 23-05-2002
WO 0160628	A	23-08-2001	AU 3835301 A WO 0160628 A2	27-08-2001 23-08-2001
US 6136083	A	24-10-2000	DE 19520964 A1 AT 179200 T AU 5818296 A CZ 9700404 A3 DE 59601722 D1 DK 830429 T3 WO 9641840 A1 EP 0830429 A1 EP 0777633 A1 ES 2130829 T3 WO 9641773 A1 JP 11507412 T JP 10504013 T PL 318504 A1	12-12-1996 15-05-1999 09-01-1997 16-07-1997 27-05-1999 31-05-1999 27-12-1996 25-03-1998 11-06-1997 01-07-1999 27-12-1996 29-06-1999 14-04-1998 23-06-1997